






USG吸入口过滤器

USG 系列

标准规格

设计压力	大气压
设计温度	110 ℃
材质	壳体 SUS304
	密封 氟丁橡胶
使用滤芯	UP、UC、HEPA
附属品	压力表、铭牌

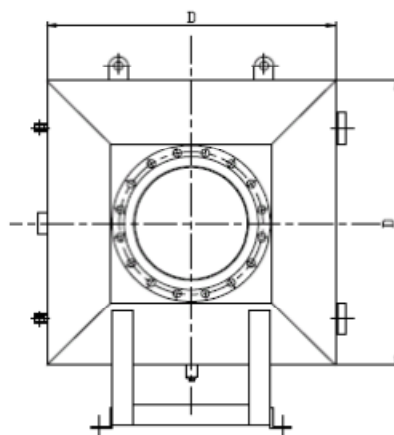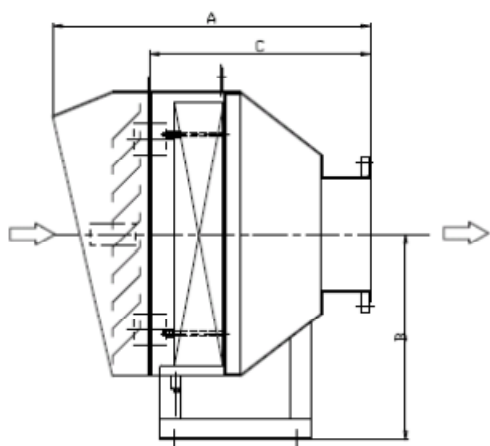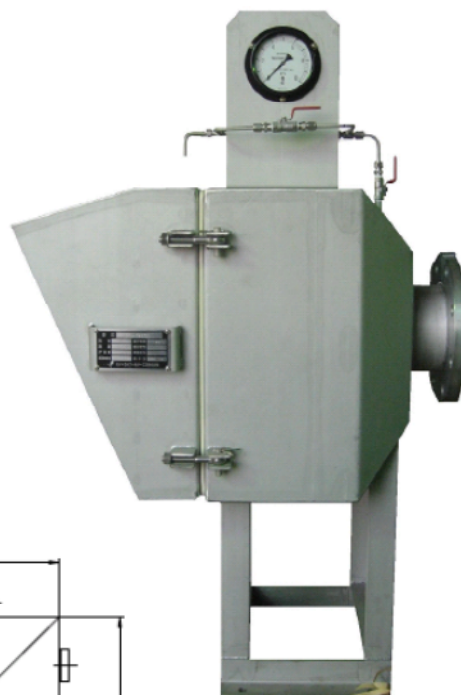

USG型各项标准尺寸

初期压力损失: 0.25 Kpa

型 式	连接口径	标准风量	过滤面积	尺寸 (mm)				使用滤芯	
	A (B)	Nm ³ /min	m ²	A	B	C	D	型式	数量
USG-03050	50 (2)	2.0	1.44	675	585	385	371	UC-305	1
USG-03051	80 (3)	4.5	1.44	675	585	385	371	UC-305	1
USG-03052	100 (4)	8.5	1.44	675	585	385	371	UC-305	1
USG-03500	125 (5)	11.0	1.85	690	610	400	416	UC-350	1
USG-04000	150 (6)	14.5	2.42	705	630	415	466	UC-400	1
USG-04500	150 (6)	18.0	3.00	740	660	450	516	UC-450	1
USG-05000	200 (8)	22.5	3.80	740	680	450	566	UC-500	1
USG-05500	200 (8)	27.0	4.66	775	710	485	616	UC-550	1
USG-06100	250 (10)	33.5	5.88	785	740	495	676	UC-610	1
USG-07000	250 (10)	44.0	7.66	850	780	560	766	UC-700	1
USG-08000	300 (12)	58.0	9.68	900	850	610	891	UC-400	4
USG-09000	350 (14)	72.0	12.00	945	900	655	891	UC-450	4
USG-10000	400 (16)	90.0	15.52	980	950	690	1091	UC-500	4
USG-11000	450 (18)	108.0	18.64	1050	1000	760	1191	UC-550	4
USG-12200	500 (20)	134.0	23.20	1100	1060	810	1311	UC-610	4
USG-14000	500 (20)	176.0	30.64	1195	1150	905	1491	UC-700	4



先特尔过滤工业股份公司
CENTRAL FILTER MFG. CO., LTD

东京总公司: 81-3-3350-0091
大阪分公司: 81-6-6345-3531

<http://www.central-filter.co.jp>